


标“*”为重点检验尺寸



所用物料均符合ROHS标准

版本	变更人	变更内容	变更时间	站别	加工工艺流程
A0				1	
				2	
				3	
				4	
				5	
				6	

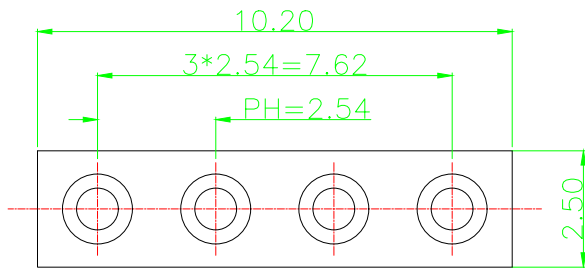

NOTE

1. Material
Plunger: Brass C6801
Housing: PA46
2. Plating
Plunger: 3 micro-inch Au over 50~100 micro-inch nickel
3. Electrical
Rated current & voltage: DC 12V; 3.0A Max.
Contact resistance: 50 mohm at working height
4. RoHS compliant product.

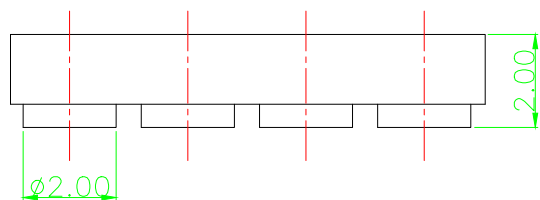

东莞市迅颢原精密连接器有限公司

Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE: X.X ±0.15 X.XX ±0.10 X.XXX ±0.05 X.* ±5' X.X' ±2'	DRAWN BY :	DATE :	PART NAME:	
	曾国平	2022. 04. 10	4PIN POGO 10.20*2.50 F	
	CHECKED BY:	DATE :	DRAW NO.	XHY-06-0333
	李海亚	2022. 04. 10	PART NO.	
UNIT: mm [inch] SCALE: 1:1	APPROVED BY:	DATE :	REMARK	
	胡超	2022. 04. 10	MOLD NO.	